



## Diesel Generator Set

# mtu 4R0113 DS63

400 – 230 V/60 kVA/50 Hz/prime power  
400 – 230 V/63 kVA/50 Hz/standby power  
IVECO – NEF45 SM 1A



Optional equipment and finishing shown. Standard may vary.

## Product highlights

### Benefits

- Low fuel consumption
- Emissions optimizations available
- High availability and reliability
- Outstanding load acceptance
- Long maintenance intervals

### Support

- Global product support offered

### Standards

- Engine-generator set is designed and manufactured in facilities certified to standards ISO 2008:9001
- Generator set complies to ISO 8528 and fullfills performance level G2
- Generator meets BS5000; NEMA MG 1; ISO; DIN EN and IEC standards
- NFPA 110

### Available emissions optimizations

- Exhaust emission EU 97/68 EC Stage II
- Fuel optimized

### Wide standard scope of supply

- 4P circuit breaker
- Island operation control panel
- Integrated fuel tank
- Industrial silencer (15 dB(A))
- Batteries & battery charger

### Complete range of accessories available

- Sound attenuated enclosure
- Fuel system accessories
- Control panel & ATS
- Range of additional electrical options

### Warranty

- Standard 36 months warranty after shipment



A Rolls-Royce  
solution

## Application data

### Engine

Manufacturer	IVECO
Model	NEF45 SM 1A
Type	4-cycle
Arrangement	4-L
Displacement: l	4.5
Bore: mm	104
Stroke: mm	132
Compression ratio	17.5
Rated rpm	1500
Engine governor	mechanical
Gross power: kWm (prime/standby)	54.5/60
Air cleaner	dry

### Fuel system

Fuel tank capacity: OPU (EPU) in l	145 (288)
Autonomy: hr	14

### Fuel consumption

	l/hr
At standby power rating:	15
At 100% of power rating:	13.7
At 50% of power rating:	7

### Liquid capacity

Total oil system: l	12.8
Total coolant capacity: l	18.5

### Generator

Generator brand	Mecc-Alte
Generator type	HM200B1N
Insulation class	H-class
Bearing	single bearing
Enclosure	IP23 M
Voltage regulation	A.V.R. (electronic)
Exciting system	self-excited, brushless

### Electrical

Electric system volts DC	12
Battery capacity: Ah	100

### Air requirements<sup>1)</sup>

Aspirating: m <sup>3</sup> /hr	377
Cooling air flow: m <sup>3</sup> /s	1.86

### Exhaust system

Gas temp. (stack) <sup>2)</sup> : °C	548
Gas volume at stack temp. <sup>3)</sup> : kg/h	325
Maximum allowable back pressure: kPa	5

### Cooling/radiator system

Ambient capacity of radiator: OPU (EPU) in °C	50 (40)
Fan power consumption: kWm	1.3

## Standard and optional features

### System ratings (kW/kVA)

	<i>mtu</i> 4R0113 DS63	<i>mtu</i> 4R0113 DS63
	Prime operation	Standby operation
Voltage	400 V	400 V
Phase	Three phase	Three phase
Hz	50	50
kWel*	48.0	50.4
kVA**	60	63
Rated AMPS	86.6	90.9

\* cos phi = 1.0

\*\* cos phi = 0.8 Also available for following voltages 380V & 415V - for details please contact your local *mtu* dealer.

- 1 Technical data is for 100% power.
- 2 Technical data is for prime power.
- 3 Technical data is for standby power.

## Standard and optional features

### Engine

- 4- strokes diesel engine
- Flywheel housing SAE 3
- Flywheel 11 1/2"
- Oil pan
- Lube oil circulation pump
- Lube oil filter
- Dry exhaust manifolds
- Hot components and radiator guards
- Mobile components guards
- Electronic engine regulat

### Fuel system

- Fuel filter with water-separator
- Direct fuel injection system
- Automatic fuel transfer pump
- Heavy-duty fuel pre-filter with water separator
- 3-way valve for fuel filling
- Integrated fuel tank (level sensor and drain cap incl.)

### Generator

- 3-Phase, synchronos, brushless, self exciting, self regulating, self ventilating alternator
- IP23 M protection degree
- IP23 protection cover
- Winding temperature sensors
- Insulation class H
- Anti condensation

### Control panel & electric options

- Control and power electric panel, with measurements devices and contoller
- ATS (Automatic Transfer Switch)
- Control version for parallel operation
- Control version for synchronizing a single genset with mains
- Programmable timer for MM7 and MC7
- Remote display
- Expansion module for CAN communication
- Change over power supply for MC7
- Input Output/LED expansion modules for DeepSea controllers
- ModBus connection to customer systems TCP/IP
- Control version for synchronizing with mains without blackout
- Converter kits CAN to RS485/USB/LAN

### Circuit breaker/power distribution

- 4 poles manual circuit breaker (motorized with DeepSea controllers)

### Starting/charging system

- 12V electric system
- Starting batteries installed
- Pre-heating resistance/jacket water heater
- Battery charging alternator
- Battery disconnecter
- Battery charger

### Air intake system

- Dry-type air filter
- Heavy duty air filter with automatic dust evacuation

- Represents standard features
- Represents optional features

## Standard and optional features

### Exhaust system

- Industrial silencer 15 dB(A)
- Residential silencer 35 dB(A)

### Cooling system

- Coolant circulation pump
- Front type radiator for jacket water
- Engine mounted fan drive

### Mounting system

- Mounted on steel base frame
- Resilient mounting of engine and generator

### Enclosures

- Sound proof enclosure
- Socket box
- Increased fuel tank capacity


### Documentation & certifications

- Genset & component manuals
- Maintenance schedule
- CE-certification for EU
- Fluids and lubricants specification

Represents standard features

Represents optional features

## Weights and dimensions

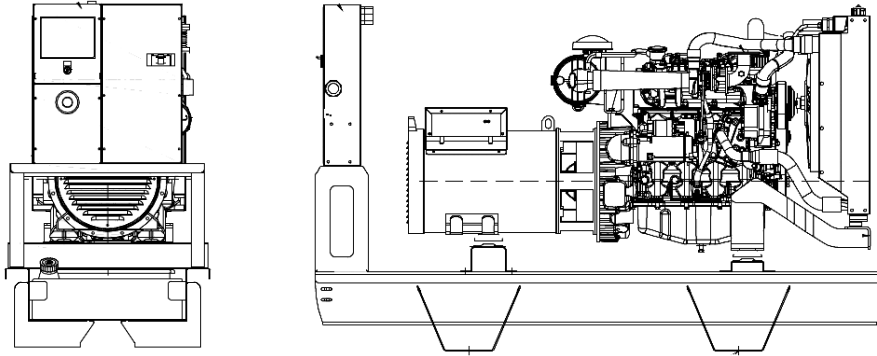

Drawing above for illustration purposes only, based on a standard open power 400 Volt engine-generator set. Lengths may vary with other voltages. Do not use for installation design. See website for unit specific template drawings.

System	Dimensions (LxWxH)	Weight (wet/with standard accessories)
Open power unit (OPU)	2150 x 780 x 1500 mm	948 kg
Enclosed power unit	2750 x 1100 x 1760 mm	1538 kg

Consult the factory for accurate weights and dimensions for your specific engine-generator set. Lengths may vary with other voltages. Do not use for installation design.

## Sound data

Unit type	
Open power unit: dB(A)	on request
Enclosed power unit: dB(A)	69

According to 2000/14/CE.  
Sound data is provided at 7m for 75% prime power.

## Rating definitions and conditions

- Prime power ratings apply to installations where utility power is unavailable or unreliable. At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO 8528-1, ISO 3046-1, BS 5514, AS 2789 and DIN 6271. Average load factor: < 75%.
- Standby ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. No overload capability for this rating. Ratings are in accordance with ISO 8528-1, ISO 3046-1, BS 5514, AS 2789 and DIN 6271. Average load factor: < 85%, max. 500h/year.
- Consult your local **mtu** distributor for derating information.  
Rated power for reference conditions at 25°C and 100m above sea level.