



## Diesel Generator Set

# mtu 4R0113 DS63

400 – 230 V/60 kVA/50 Hz/prime power  
400 – 230 V/63 kVA/50 Hz/standby power  
IVECO – NEF45 SM 1A



Optional equipment and finishing shown. Standard may vary.

## Product highlights

### Benefits

- Low fuel consumption
- Emissions optimizations available
- High availability and reliability
- Outstanding load acceptance
- Long maintenance intervals

### Support

- Global product support offered

### Standards

- Engine-generator set is designed and manufactured in facilities certified to standards ISO 2008:9001
- Generator set complies to ISO 8528 and fullfills performance level G2
- Generator meets BS5000; NEMA MG 1; ISO; DIN EN and IEC standards
- NFPA 110

### Available emissions optimizations

- Exhaust emission EU 97/68 EC Stage II
- Fuel optimized

### Wide standard scope of supply

- 4P circuit breaker
- Island operation control panel
- Integrated fuel tank
- Industrial silencer (15 dB(A))
- Batteries & battery charger

### Complete range of accessories available

- Sound attenuated enclosure
- Fuel system accessories
- Control panel & ATS
- Range of additional electronical options

### Warranty

- Standard 36 months warranty after shipment



A Rolls-Royce  
solution

## Application data

### Engine

Manufacturer	IVECO
Model	NEF45 SM 1A
Type	4-cycle
Arrangement	4-L
Displacement: l	4.5
Bore: mm	104
Stroke: mm	132
Compression ratio	17.5
Rated rpm	1500
Engine governor	mechanical
Gross power: kWm (prime/standby)	54.5/60
Air cleaner	dry

### Fuel system

Fuel tank capacity: OPU (EPU) in l	145 (288)
Autonomy: hr	14

### Fuel consumption

	l/hr
At standby power rating:	15
At 100% of power rating:	13.7
At 50% of power rating:	7

### Liquid capacity

Total oil system: l	12.8
Total coolant capacity: l	18.5

### Generator

Generator brand	Mecc-Alte
Generator type	HM200B1N
Insulation class	H-class
Bearing	single bearing
Enclosure	IP23 M
Voltage regulation	A.V.R. (electronic)
Exciting system	self-excited, brushless

### Electrical

Electric system volts DC	12
Battery capacity: Ah	100

### Air requirements<sup>1)</sup>

Aspirating: m <sup>3</sup> /hr	377
Cooling air flow: m <sup>3</sup> /s	1.86

### Exhaust system

Gas temp. (stack) <sup>2)</sup> : °C	548
Gas volume at stack temp. <sup>3)</sup> : kg/h	325
Maximum allowable back pressure: kPa	5

### Cooling/radiator system

Ambient capacity of radiator: OPU (EPU) in °C	50 (40)
Fan power consumption: kWm	1.3

## Standard and optional features

### System ratings (kW/kVA)

	<i>mtu</i> 4R0113 DS63	<i>mtu</i> 4R0113 DS63
	Prime operation	Standby operation
Voltage	400 V	400 V
Phase	Three phase	Three phase
Hz	50	50
kWel*	48.0	50.4
kVA**	60	63
Rated AMPS	86.6	90.9

\* cos phi = 1.0

\*\* cos phi = 0.8      Also available for following voltages 380V & 415V - for details please contact your local *mtu* dealer.

- 1      Technical data is for 100% power.
- 2      Technical data is for prime power.
- 3      Technical data is for standby power.

## Standard and optional features

### Engine

- |  |   |  |
|--|---|--|
| <input checked="" type="checkbox"/> 4- strokes diesel engine | <input checked="" type="checkbox"/> Lube oil circulation pump | <input checked="" type="checkbox"/> Hot components and radiator guards |
| <input checked="" type="checkbox"/> Flywheel housing SAE 3   | <input checked="" type="checkbox"/> Lube oil filter           | <input checked="" type="checkbox"/> Mobile components guards           |
| <input checked="" type="checkbox"/> Flywheel 11 1/2"         | <input checked="" type="checkbox"/> Dry exhaust manifolds     | <input type="checkbox"/> Electronic engine regulat                     |
| <input checked="" type="checkbox"/> Oil pan                  |   |  |

### Fuel system

- |  |  |   |
|--|--|---|
| <input checked="" type="checkbox"/> Fuel filter with water-separator | <input type="checkbox"/> Automatic fuel transfer pump                    | <input type="checkbox"/> 3-way valve for fuel filling                                       |
| <input checked="" type="checkbox"/> Direct fuel injection system     | <input type="checkbox"/> Heavy-duty fuel pre-filter with water separator | <input checked="" type="checkbox"/> Integrated fuel tank (level sensor and drain cap incl.) |

### Generator

- |   |  |  |
|---|--|--|
| <input checked="" type="checkbox"/> 3-Phase, synchronos, brushless, self exciting, self regulating, self ventilating alternator | <input checked="" type="checkbox"/> IP23 M protection degree | <input checked="" type="checkbox"/> Insulation class H |
|   | <input type="checkbox"/> IP23 protection cover               | <input type="checkbox"/> Anti condensation             |
|   | <input type="checkbox"/> Winding temperature sensors         |  |

### Control panel & electric options

- |   |   |  |
|---|---|--|
| <input checked="" type="checkbox"/> Control and power electric panel, with measurements devices and contoller | <input type="checkbox"/> Remote display   | <input type="checkbox"/> ModBus connection to customer systems TCP/IP                  |
| <input type="checkbox"/> ATS (Automatic Transfer Switch)  | <input type="checkbox"/> Expansion module for CAN communication                     | <input type="checkbox"/> Control version for synchronizing with mains without blackout |
| <input type="checkbox"/> Control version for parallel operation   | <input type="checkbox"/> Change over power supply for MC7                           | <input type="checkbox"/> Converter kits CAN to RS485/USB/LAN                           |
| <input type="checkbox"/> Control version for synchronizing a single genset with mains                         | <input type="checkbox"/> Input Output/LED expansion modules for DeepSea controllers |  |
| <input type="checkbox"/> Programmable timer for MM7 and MC7   |   |  |

### Circuit breaker/power distribution

- |   |
|---|
| <input checked="" type="checkbox"/> 4 poles manual circuit breaker (motorized with DeepSea controllers) |
|---|

### Starting/charging system

- |  |  |   |
|--|--|---|
| <input checked="" type="checkbox"/> 12V electric system          | <input checked="" type="checkbox"/> Pre-heating resistance/jacket water heater | <input checked="" type="checkbox"/> Battery charging alternator |
| <input checked="" type="checkbox"/> Starting batteries installed |  | <input type="checkbox"/> Battery disconnecter                   |
|  |  | <input checked="" type="checkbox"/> Battery charger             |

### Air intake system

- |   |   |
|---|---|
| <input checked="" type="checkbox"/> Dry-type air filter | <input type="checkbox"/> Heavy duty air filter with automatic dust evacuation |
|---|---|

- ☒ Represents standard features  
☐ Represents optional features

# Standard and optional features

## Exhaust system

- ☒ Industrial silencer 15 dB(A)
- ☐ Residential silencer 35 dB(A)

## Cooling system

- ☒ Coolant circulation pump
- ☒ Front type radiator for jacket water
- ☒ Engine mounted fan drive

## Mounting system

- ☒ Mounted on steel base frame
- ☒ Resilent mounting of engine and generator


## Enclosures

- ☐ Sound proof enclosure
- ☐ Socket box
- ☐ Increased fuel tank capacity

## Documentation & certifications

- ☒ Genset & component manuals
- ☒ CE-certification for EU
- ☒ Maintaince schedule
- ☒ Fluids and lubricants specification

## Weights and dimensions

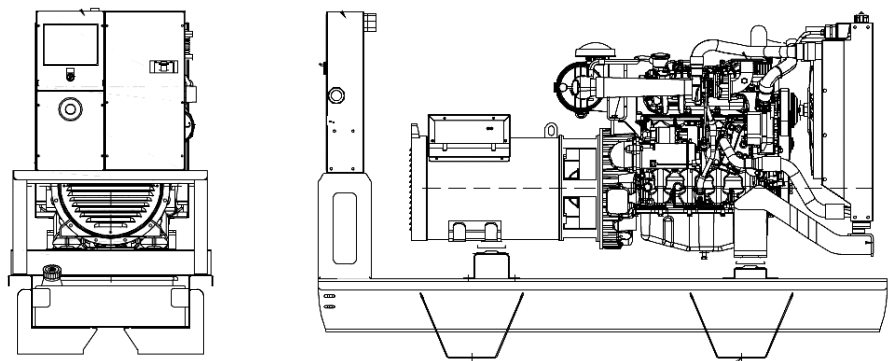

Drawing above for illustration purposes only, based on a standard open power 400 Volt engine-generator set. Lengths may vary with other voltages. Do not use for installation design. See website for unit specific template drawings.

System	Dimensions (LxWxH)	Weight (wet/with standard accessories)
Open power unit (OPU)	2150 x 780 x 1500 mm	948 kg
Enclosed power unit	2750 x 1100 x 1760 mm	1538 kg

Consult the factory for accurate weights and dimensions for your specific engine-generator set. Lengths may vary with other voltages. Do not use for installation design.

## Sound data

Unit type	
Open power unit: dB(A)	on request
Enclosed power unit: dB(A)	69

According to 2000/14/CE.  
Sound data is provided at 7m for 75% prime power.

## Rating definitions and conditions

- Prime power ratings apply to installations where utility power is unavailable or unreliable. At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO 8528-1, ISO 3046-1, BS 5514, AS 2789 and DIN 6271. Average load factor: < 75%.
  - Standby ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. No overload capability for this rating. Ratings are in accordance with ISO 8528-1, ISO 3046-1, BS 5514, AS 2789 and DIN 6271. Average load factor: < 85%, max. 500h/year.
- Consult your local **mtu** distributor for derating information.

Rated power for reference conditions at 25°C and 100m above sea level.