




## Diesel Generator Set

# mtu 16V2000 DS1250

380V - 415V/50 Hz/prime power for stationary emergency/  
fuel consumption optimized/16V2000G36F/air charge air cooling

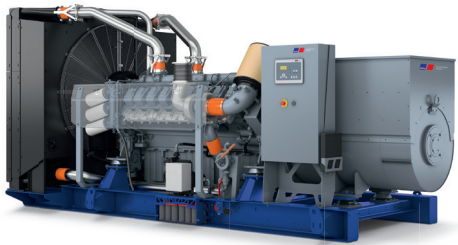

Optional equipment and finishing shown. Standard may vary.

## Product highlights

### Benefits

- Low fuel consumption
- Optimized system integration ability
- High reliability and availability of power
- Long maintenance intervals
- Optimized ratio between size and power
- Wide operating range without derating

### Support

- Global product support offered

### Standards

- Engine-generator set is designed and manufactured in facilities certified to standards ISO 2008:9001 and ISO 2004:14001
- Generator set complies to G3 according to ISO 8528
- Generator meets NEMA MG1, BS5000, ISO, DIN EN and IEC standards
- NFPA 110

### Power rating

- System rating: 1135 kVA
- Accepts rated load in one step per NFPA 110
- Generator set complies to G3 according to ISO 8528-5
- Generator set exceeds load steps according to ISO 8528-5

### Performance assurance certification (PAC)

- Engine-generator set tested to ISO 8528-5 for transient response
- 85% load factor for continuous power applications
- Verified product design, quality and performance integrity
- All engine systems are prototype and factory tested

### Complete range of accessories available

- Control panel
- Power panel
- Fuel system
- Fuel connections with shut-off valve mounted to base frame
- Starting/charging system
- Exhaust system
- Mechanical radiator
- Oversized voltage alternators

### Emissions

- Fuel consumption optimized
- NOx emission optimized, Tier 2 compliant and NEA (ORDE) optimization optionally available

### Certifications

- CE certification option
- VDE4110 certification



A Rolls-Royce  
solution

## Application data <sup>1)</sup>

| Engine                                   | Fuel consump. opt. | Emission opt. <sup>2)</sup> | Cooling/radiator system                            | Fuel consump. opt. | Emission opt. <sup>2)</sup> |
|--|--------------------|-----------------------------|--|--------------------|-----------------------------|
| Manufacturer                             | <i>mtu</i>         | <i>mtu</i>                  | Coolant flow rate (HT circuit): m <sup>3</sup> /hr | 41.6               | 41.6                        |
| Model                                    | 16V2000G36F        | 16V2000G36F                 | Heat rejection to coolant: kW                      | 395                | 375                         |
| Type                                     | 4-cycle            | 4-cycle                     | Heat radiated to charge air cooling: kW            | 190                | 250                         |
| Arrangement                              | 16V                | 16V                         | Heat radiated to ambient: kW                       | 40                 | 40                          |
| Displacement: l                          | 35.7               | 35.7                        | Fan power for mech. radiator (40°C):               | 43.4               | 43.4                        |
| Bore: mm                                 | 135                | 135                         | Fan power for mech. radiator (50°C):               | 43.4               | 43.4                        |
| Stroke: mm                               | 156                | 156                         | Air flow required for mech. radiator (40°C)        |                    |                             |
| Compression ratio                        | 17.5               | 17.5                        | cooled unit: m <sup>3</sup> /min                   | 1462               | 1462                        |
| Rated speed: rpm                         | 1500               | 1500                        | Air flow required for mech. radiator (50°C)        |                    |                             |
| Engine governor                          | ADEC (ECU 9)       | ADEC (ECU 9)                | cooled unit: m <sup>3</sup> /min                   | 1462               | 1462                        |
| Speed regulation                         | ± 0.25%            | ± 0.25%                     | Engine coolant capacity                            |                    |                             |
| Max power: kWm                           | 1000               | 1000                        | (without cooling equipment): l                     | 70                 | 70                          |
| Mean effective pressure: bar             | 22.4               | 22.4                        | Radiator coolant capacity (40°C): l                | 74                 | 74                          |
| Air cleaner                              | dry                | dry                         | Radiator coolant capacity (50°C): l                | 106                | 106                         |
|  |                    |                             | Max. coolant temperature (warning): °C             | 102                | 102                         |
|  |                    |                             | Max. coolant temperature (shutdown): °C            | 105                | 105                         |
| <b>Fuel system</b>                       |                    |                             | <b>Exhaust system</b>                              |                    |                             |
| Maximum fuel lift: m                     | 5                  | 5                           | Exhaust gas temp. (after turbocharger): °C         | 530                | 520                         |
| Total fuel flow: l/min                   | 30                 | 30                          | Exhaust gas volume: m <sup>3</sup> /s              | 3.12               | 3.37                        |
| <b>Fuel consumption <sup>3)</sup></b>    |                    |                             | Maximum allowable back pressure: mbar              | 50                 | 50                          |
| At 100% of power rating: l/hr g/kWh      | 231/192            | 242/201                     | Minimum allowable back pressure: mbar              | 30                 | 30                          |
| At 75% of power rating: l/hr g/kWh       | 173/192            | 183/203                     |  |                    |                             |
| At 50% of power rating: l/hr g/kWh       | 120/199            | 127/210                     |  |                    |                             |
| <b>Lube oil system</b>                   |                    |                             | <b>Generator</b>                                   |                    |                             |
| Total oil system capacity: l             | 102                | 102                         | Protection class                                   | IP23               | IP23                        |
| Max. lube oil temp. (alarm): °C          | 103                | 103                         | Insulation class                                   | H                  | H                           |
| Max. lube oil temp. (shutdown): °C       | 105                | 105                         | Voltage regulation (steady state)                  | ± 0.25%            | ± 0.25%                     |
| Min. lube oil pressure (alarm): bar      | 4.5                | 4.5                         | Rado interference class                            | N                  | N                           |
| Min. lube oil pressure (shutdown): bar   | 4                  | 4                           |  |                    |                             |
| <b>Combustion air requirements</b>       |                    |                             |  |                    |                             |
| Combustion air volume: m <sup>3</sup> /s | 1.17               | 1.24                        |  |                    |                             |
| Max. air intake restriction: mbar        | 40                 | 40                          |  |                    |                             |

1 All data refers only to the engine and is based on ISO standard conditions (25°C and 100m above sea level).

2 Emission optimized data refer to NOx emission optimized and NEA (ORDE) optimized/Tier 2 compliant engines.

3 Values referenced are in accordance with ISO 3046-1. Conversion calculated with fuel density of 0.83 g/ml. All fuel consumption values refer to rated engine power.

## Standard and optional features

### System ratings (kW/kVA)

| Generator model   | Voltage | with mechanical radiator** |      |      |
|---|---------|----------------------------|------|------|
|   |         | kWel                       | kVA* | AMPS |
| Leroy Somer LSA 50.2 M6<br>(Low voltage<br>Leroy Somer standard)  | 380 V   | 908                        | 1135 | 1724 |
|   | 400 V   | 908                        | 1135 | 1638 |
|   | 415 V   | 908                        | 1135 | 1579 |
| Leroy Somer LSA 50.2 L7<br>(Low voltage<br>Leroy Somer oversized) | 380 V   | 908                        | 1135 | 1724 |
|   | 400 V   | 908                        | 1135 | 1638 |
|   | 415 V   | 908                        | 1135 | 1579 |
| Marathon 740RSL7183<br>(Low voltage<br>Marathon standard)         | 380 V   | 908                        | 1135 | 1724 |
|   | 400 V   | 908                        | 1135 | 1638 |
|   | 415 V   | 908                        | 1135 | 1579 |
| Marathon 742RSL7185<br>(Low voltage<br>Marathon oversized)        | 380 V   | 908                        | 1135 | 1724 |
|   | 400 V   | 908                        | 1135 | 1638 |
|   | 415 V   | 908                        | 1135 | 1579 |

\* cos phi = 0.8

\*\* BE, fuel optimized: max. power available up to: open power unit 40°C/400m; NOx emission optimized, EPA Tier 2 compl., NEA: standard operating conditions/open power unit 25°C/100m

Electrical outputs may vary depending on generator voltage and ambient conditions. For power outputs consult your **mtu** dealer.

Intake air depression/mbar: 15mbar

Exhaust back pressure/mbar: 30mbar

### Engine

- 4-cycle
- Standard single stage air filter
- Oil drain extension & shut-off valve
- Full flow oil filters
- Closed crankcase ventilation
- Governor-electronic isochronous ADEC/ECU9
- Common rail fuel injection
- Dry exhaust manifold
- Electric starting motor (24V)
- Fuel consumption optimized engine
- NOx emission optimized engine
- Tier 2 optimized engine
- NEA (ORDE) optimized engine

### Generator

- Leroy Somer low voltage generator
- Meets NEMA MG1, BS5000, IEC 60034-1, VDE 0530, DIN EN 12601, AS1359 and ISO 8528 requirements
- Superior voltage waveform
- Solid state, volts-per-Hertz regulator
- 4 pole three-phase synchronous generator
- Brushless, self-excited, self-regulating, self-ventilated
- Digital voltage regulator
- Anti condensation heater
- Stator winding Y-connected, accessible neutral (brought out)
- Protection IP 23
- less than 5% harmonic distortion
- 2/3 pitch stator windings
- No load to full load regulation
- ± 0.25% voltage regulation no load to full load
- Insulation class H, utilization acc. to H
- Radio suppression EN55011, group 1, cl. B
- Short circuit capability 3xIn for 10sec
- Sustained short circuit current of up to 300% of the rated current for up to 10 seconds (Leroy Somer generator)
- Winding and bearing RTDs (without monitoring)
- Excitation by AREP + PMI
- Mounting of CT's: 3x 2 core CT's
- Voltage setpoint adjustment ±10V
- Sustained short circuit current of up to 250% of the rated current for up to 10 seconds (Marathon generator)
- Marathon low voltage generator
- Oversized generator

Represents standard features

Represents optional features

## Standard and optional features

### Cooling system

- Jacket water pump
- Thermostat(s)
- Air charge air cooling
- Mechanical radiator
- Jacket water heater

### Control panel

- Pre-wired control cabinet for easy application of customized controller (V1+)
- Island operation (V2)
- Automatic mains failure operation with ATS (V3a)
- Automatic mains failure operation incl. control of generator and mains breaker (V3b)
- Island parallel operation of multiple gensets (V4)
- Automatic mains failure operation with short (< 10s) mains parallel overlap synchronization (V5)
- Mains parallel operation of a single genset (V6)
- Mains parallel operation of multiple gensets (V7)
- Basler controller
- Deif controller
- Complete system metering
- Digital metering
- Engine parameters
- Generator protection functions
- Engine protection
- SAE J1939 engine ECU communications
- Parametrization software
- Multilingual capability
- Multiple programmable contact inputs
- Multiple contact outputs
- Event recording
- IP 54 front panel rating with integrated gasket
- Different expansion modules
- Remote annunciator
- Daytank control
- Generator winding- and bearing temperature monitoring
- Differential protection with multi-function protection relay
- Modbus TCP-IP

### Power panel

- Available in 600x600
- Phase monitoring relay 230V/400V
- Supply for battery charger
- Supply for jacket water heater
- Plug socket cabinet for 230V compatible Euro

### Fuel system

- Flexible fuel connectors mounted to base frame
- Fuel filter with water separator
- Switchable fuel filter with water separator
- Fuel cooler

### Starting/charging system

- 24V starter
- Starter batteries, cables, rack, disconnect switch
- Battery charger
- Redundant starter 2x 7.5KW

### Mounting system


- Welded base frame
- Resilient engine and generator mounting
- Modular base frame design

### Exhaust system

- Exhaust bellows with connection flange
- Exhaust silencer with 10 dB(A) sound attenuation
- Exhaust silencer with 30 dB(A) sound attenuation
- Exhaust silencer with 40 dB(A) sound attenuation
- Y-connection-pipe

- Represents standard features
- Represents optional features

## Weights and dimensions

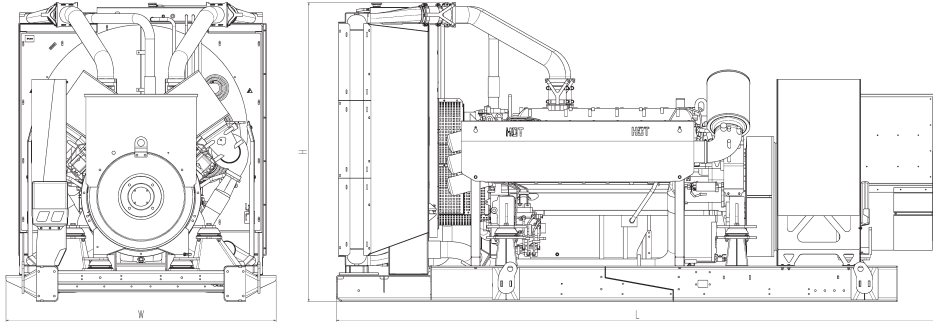

Drawing above for illustration purposes only, based on a standard open power 400 Volt engine-generator set. Lengths may vary with other voltages. Do not use for installation design. See website for unit specific template drawings.

| System                | Dimensions (LxWxH)    | Weight (dry/less tank) |
|-----------------------|-----------------------|------------------------|
| Open power unit (OPU) | 4440 x 1990 x 2200 mm | 7100 kg                |

Weights and dimensions are based on open power units and are estimates only. Consult the factory for accurate weights and dimensions for your specific engine-generator set.

## Sound data

- Consult your local **mtu** distributor for sound data.

## Emissions data

- Consult your local **mtu** distributor for emissions data.

## Rating definitions and conditions

- Prime power for stationary emergency ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO 8528-1, ISO-3046-1, BS 5514 and AS 2789. Average load factor:  $\leq 85\%$ . Operating hours/year: max. 500.
- Consult your local **mtu** distributor for derating information.